

IMPROVEMENT PLANS FOR
CROSSINGS ROAD RESURFACING PROJECT
PERKINS TOWNSHIP
ERIE COUNTY, OHIO

PROJECT DESCRIPTION

This project will include pavement resurfacing on Crossings Road from STA. 0+87.38 to end and Fun Drive from Crossings Road to STA. 5+82.65

INDEX

NO.	DESCRIPTION
1	TITLE SHEET
2	GENERAL NOTES
3	PAVING PLAN
4	DETAILS



SITE MAP

UNDERGROUND UTILITIES

Contact Two Working Days
Before You Dig



OHIO811, 8-1-1, or 1-800-362-2764
(Non-members must be called directly)

PERKINS TOWNSHIP TRUSTEE'S APPROVAL

I hereby approve these plans

Timothy Coleman
Trustee

Date

James Lang
Trustee

Date

James Ommert
Trustee

Date


PLANS PREPARED BY

Engineer & Surveyor
Contractors Design Engineering, Ltd.
4853 State Route 601
Norwalk, Ohio 44857
Phone: (419) 663-0885
Fax: (419) 663-2805
E-Mail: adam@contractorsdesigneng.com




Adam E. Weaver, P.E., P.S.

the 17th day of February, 2026



CROSSINGS RD. RESURFACING
PROJECT
TITLE SHEET



 **CONTRACTORS
DESIGN ENGINEERING**
CONSULTING ENGINEERS & SURVEYORS
NORWALK, OHIO

DATE: Feb., 2026	CK'D. BY: AEW	PROJECT NO. 26-204
DR. BY: DAG	REV'D BY:	

File Name: Z:\CDEng26\26-204 Perkins Twp - Crossings Rd Improvements\26-204 CROSSINGS .dwg

GENERAL NOTES

SPECIFICATIONS:

The current Construction and Material Specifications (CMS) of the State of Ohio Department of Transportation, including any changes and supplemental specifications listed hereon, shall govern this project.
Item numbers referred to herein conform to the State of Ohio Department of Transportation, Construction and Material Specifications, Current Edition.

ELEVATION DATUM

All elevations are based on NAVD '88 Datum and verified by a Surveyor.

PERMITS

The contractor shall be responsible for obtaining all necessary permits.

UNDERGROUND UTILITIES

The locations of the underground utilities shown on the plans have been obtained by diligent field checks and searches of available records. It is believed that they are essentially correct, but Contractors Design Engineering, nor Perkins Township guarantee their accuracy or completeness. The exact location and projection of the underground utilities are the responsibility of the contractor.

OHIO UTILITY PROTECTION SERVICE:

The contractor shall notify the Ohio Utility Protection Service [800-362-2764] forty-eight [48] hours before his work is in progress and shall make such arrangements as are necessary in the event emergency repairs should become necessary.

LIST OF UTILITIES

Gas	Columbia Gas of Ohio, Inc. 1800 Broad Ave. Findlay, Ohio 45840 Phone: 419-277-1349	Sanitary Sewers & Water Mains	Erie County Department of Environmental Services 554 River Road Huron, Ohio 44839 Phone: 419-433-7303
Telephone	Frontier 83 Townsend Ave. Norwalk, Ohio 44857 Phone: 419-744-3619	Electric	Ohio Edison Company 2508 W. Perkins Ave. Sandusky, Ohio 44870 Phone: 419-627-6881
Cable T.V.	Buckeye Broadband 2700 Oregon Road Northwood, Ohio 43619 Phone: 419-724-3713	Street & Storm	Perkins Township Highway Dept. 2610 Columbus Ave. Sandusky, Ohio 44870 Phone: 419-609-1400

EXISTING ROADWAY DRAINAGE

Existing roadway ditches, culverts pipes and drives disturbed during construction shall be regraded and replaced to conform to conditions prior to construction and shall be seeded as directed by the Engineer or the Township.

LAWN AREAS:

Existing lawn areas disturbed during construction shall be replaced to a condition equal to or exceeding original condition and as approved by the Engineer or the Township.

EXISTING TREES

Existing trees not indicated for removal shall not be disturbed during construction operations. All cuts or wounds measuring one or more inches in diameter and all exposed wood or scars resulting from this construction shall be painted with an approved paint or tree wound dressing.

ITEM 614, MAINTAINING TRAFFIC

Traffic shall be maintained on all roads of this project at all times.
Length and duration of the lane closures and restrictions shall be at the approval of Perkins Township. It is the intent to minimize the impact to the traveling Public.
The Contractor shall provide, erect and maintain signs, barricades, gates and lights in accordance with ODOT 614 and other applicable portions of the specifications, as well as the Ohio Manual of Uniform Traffic Control Devices. Payment for all labor, equipment and materials shall be included in the Lump Sum price for Item 614 Maintain Traffic, unless separately itemized in the Plan.

UTILITY SERVICES

Relocation or repair of utility services, disturbed by the work will be the responsibility of the contractor. The cost shall be included in the cost of the project.

UTILITY POLES

All utility poles within this project that require relocation shall be moved by there respective owners so not as to interfere with the progress of the work.
The contractor shall coordinate with the respective utility owners to provide adequate temporary support when trenching near the remaining utility poles and guy wires.

CONSTRUCTION LAYOUT

All construction layout shall be the responsibility of the contractor and shall be provided by a Licensed Professional Surveyor.

GENERAL NOTES

- UTILITY COMPANIES SHALL BE NOTIFIED PRIOR TO THE START OF CONSTRUCTION SO THAT EACH CAN LOCATE AND/OR PROTECT THEIR UTILITIES.
- WHERE IT IS NECESSARY TO DISTURB SIGNS, LAWNS, DRIVEWAYS, LANDSCAPING, FENCES, SHRUBS, ETC. IT SHALL BE THE CONTRACTOR'S RESPONSIBILITY TO RESTORE THE AREA TO A CONDITION AT LEAST AS GOOD AS IT WAS PRIOR TO THE ONSET OF CONSTRUCTION.
- WHEREVER IN THE CONTRACT DOCUMENTS REFERENCE IS MADE TO THE CONSTRUCTION AND MATERIALS SPECIFICATIONS OF THE OHIO DEPARTMENT OF TRANSPORTATION (ODOT) CURRENT EDITION, THE PROVISIONS OF THE REFERENCED ITEM SHALL HAVE THE FULL FORCE AND EFFECT AS IF REPRODUCED HEREIN IN THEIR ENTIRETY. HOWEVER, THE METHOD MEASUREMENTS, BASIS OF PAYMENT AND PAY ITEMS SHALL BE AS DIRECTED IN THE MATERIAL SPECIFICATIONS OR BID PROPOSAL FORMS. THE CONTRACTOR SHALL BE RESPONSIBLE FOR PROVIDING HIS OWN COPY OF THE ODOT CONSTRUCTION AND MATERIAL SPECIFICATIONS.
- THE CONTRACTOR SHALL BE RESPONSIBLE FOR CONTROLLING DUST, DIRT AND MUD DUE TO CONSTRUCTION IN THE PROJECT AREA DURING THE LIFE OF THE PROJECT. DUST CONTROL OPERATIONS SHALL BE PREFORMED BY THE CONTRACTOR AT THE TIME, LOCATION AND IN THE AMOUNT ORDERED BY THE OWNER AND SHALL BE IN ACCORDANCE WITH ITEM 616 OF THE OHIO DEPARTMENT OF TRANSPORTATION CONSTRUCTION AND MATERIAL SPECIFICATIONS. THE COST FOR THESE OPERATIONS SHALL BE CONSIDERED AS GENERAL OVERHEAD COSTS AND NO SEPARATE COMPENSATION WILL BE AWARDED.
- THE CONTRACTOR SHALL BE RESPONSIBLE FOR TEMPORARY STORM WATER POLLUTION, SOIL EROSION AND SILTATION CONTROL DUE TO CONSTRUCTION WITHIN THE PROJECT AREA AND DURING THE LIFE OF THE PROJECT. THESE TEMPORARY OPERATIONS SHALL BE PERFORMED IN ACCORDANCE WITH ODOT #207, LATEST REVISION AND AS DIRECTED BY THE ENGINEER. COST FOR SAID CONTROLS SHALL BE CONSIDERED AS GENERAL OVERHEAD COSTS AND NO SEPARATE COMPENSATION WILL BE MADE.
- NOT ALL GAS LINES AND FIBER OPTICS LINES MAY HAVE BEEN MARKED.



CROSSINGS RD. RESURFACING PROJECT GENERAL NOTES

2
4


 **CONTRACTORS
DESIGN ENGINEERING**
CONSULTING ENGINEERS & SURVEYORS
NORWALK, OHIO

DATE:	Feb., 2026	CK'D. BY:	AEW	PROJECT NO. 26-204
DR. BY:	DAG	REV'D BY:		

File Name: Z:\CDEng26\26-204 Perkins Twp - Crossings Rd Improvements\26-204 CROSSINGS .dwg

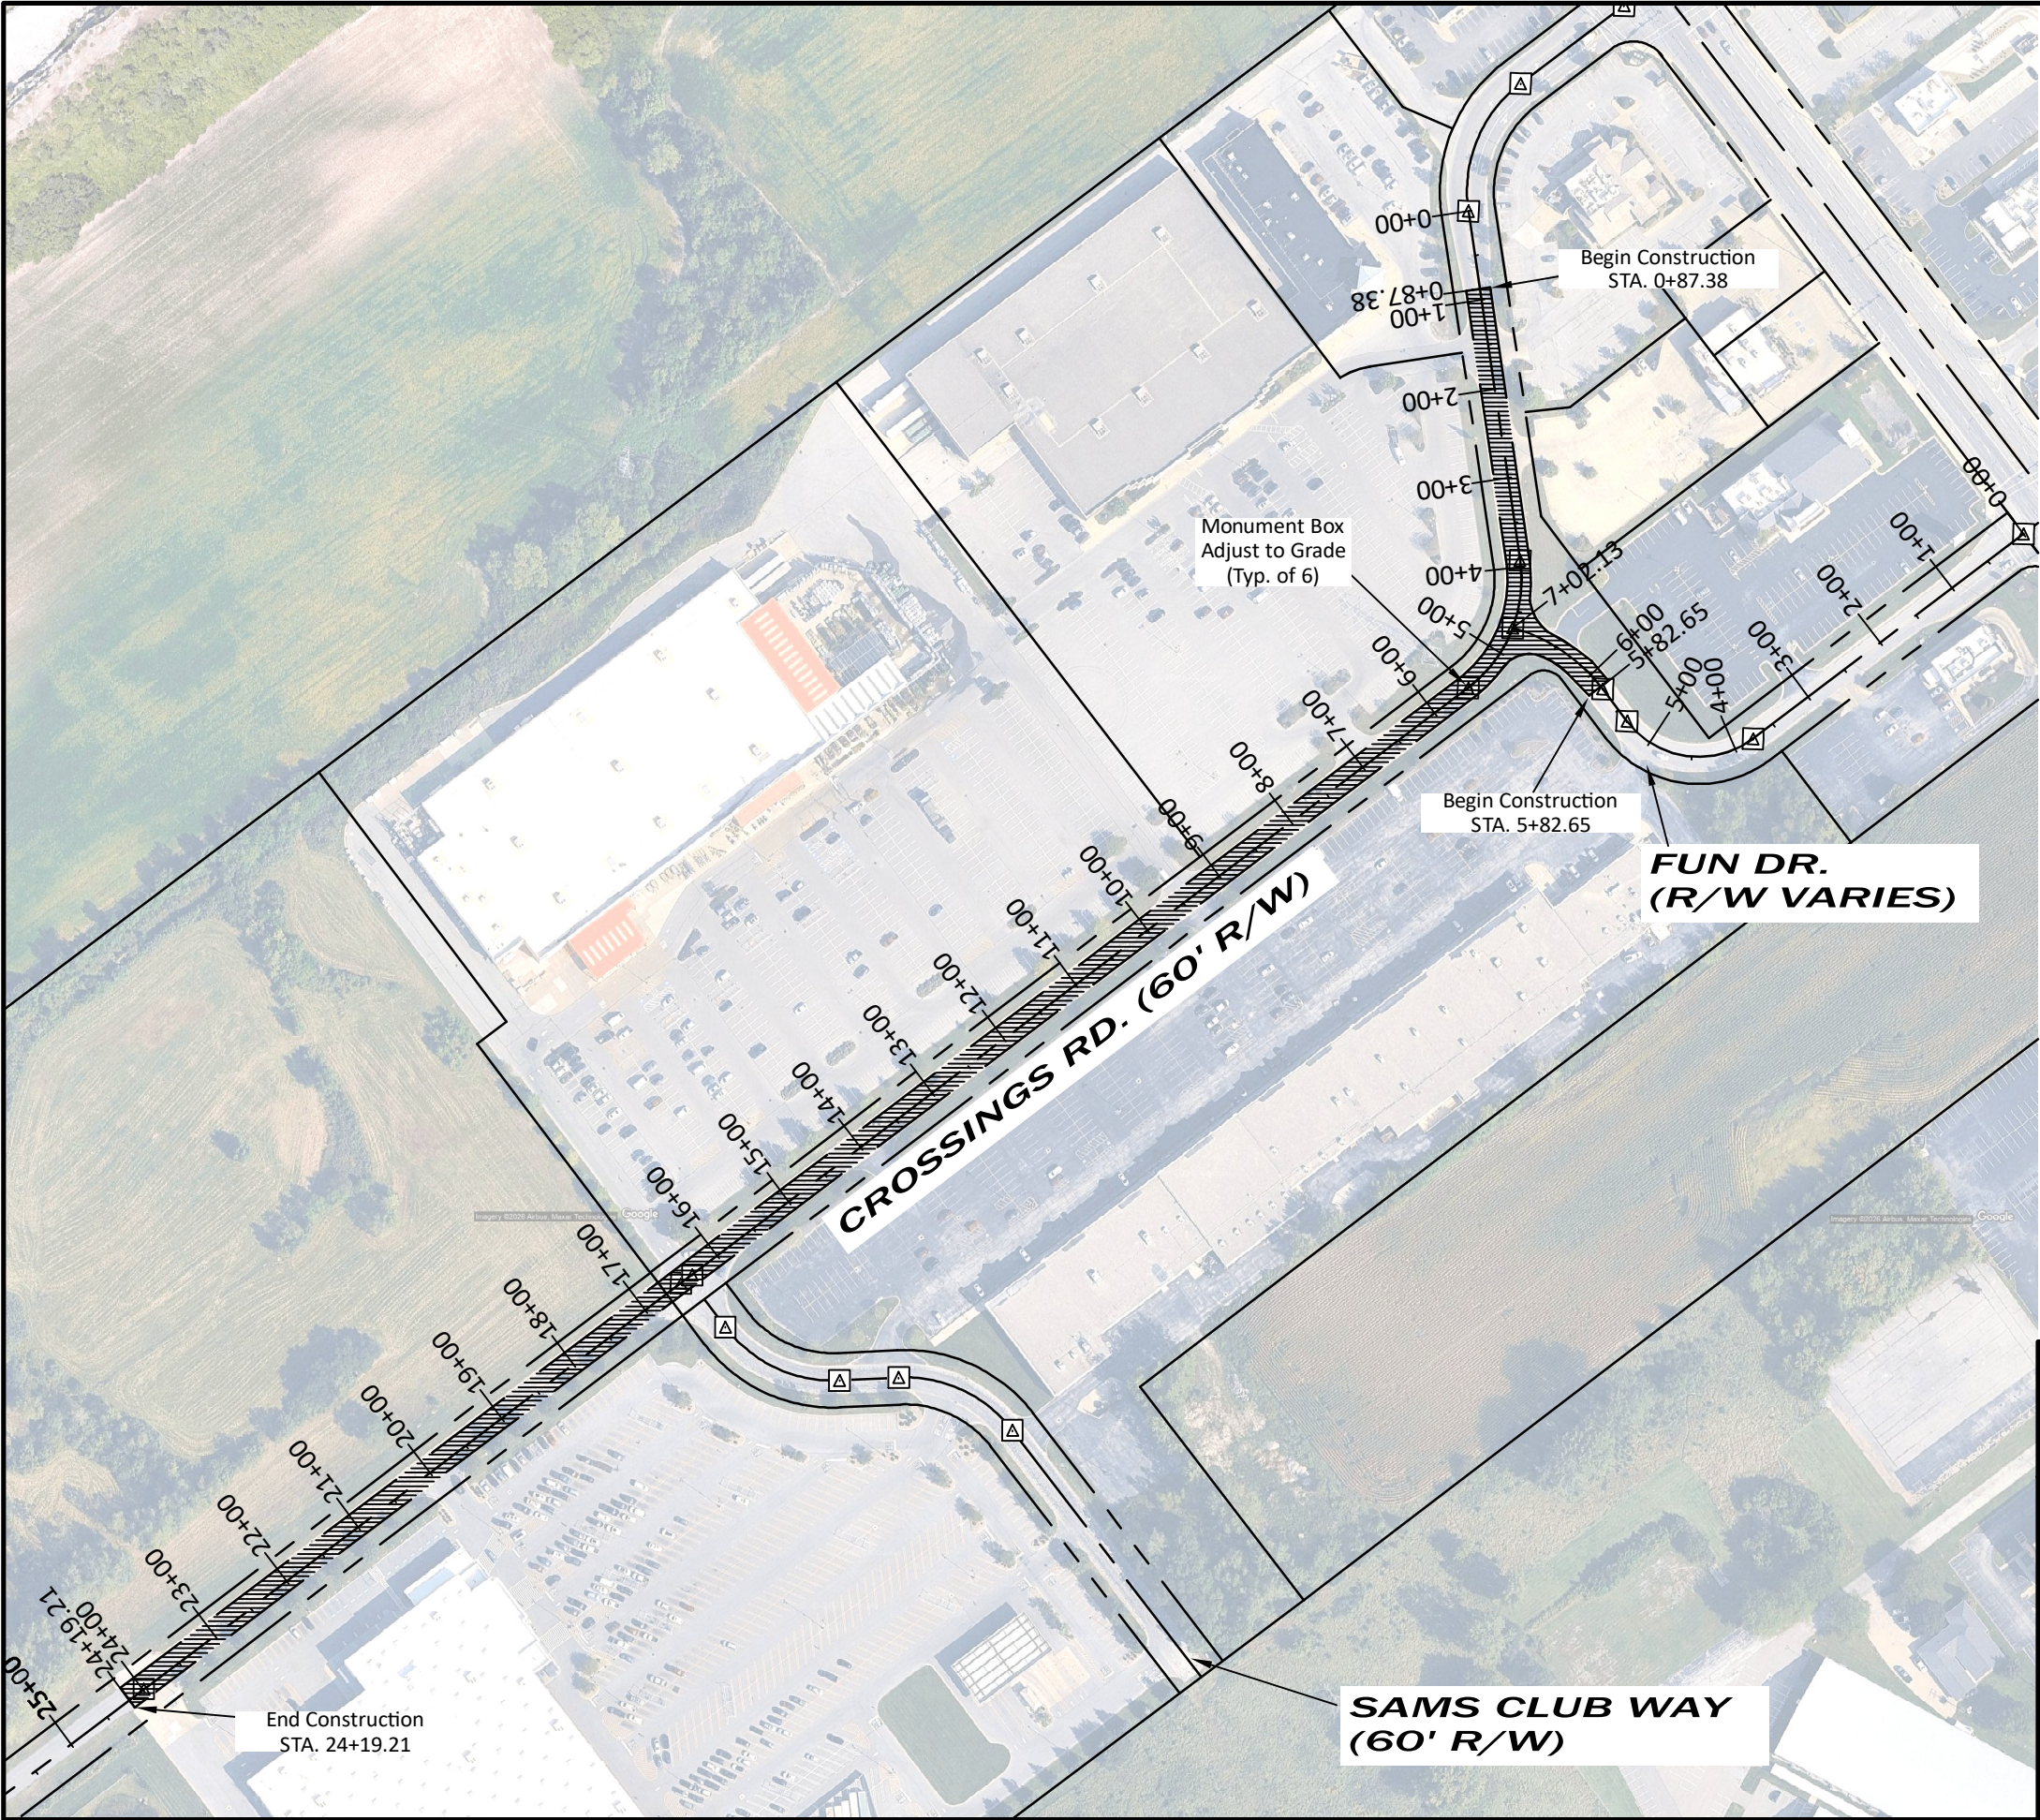

LEGEND	
SYMBOL	DESCRIPTION
	LIMITS OF RESURFACING
	MONUMENT BOX



CROSSINGS RD. RESURFACING
PROJECT
PAVING PLAN

3
4


CONTRACTORS
DESIGN ENGINEERING
CONSULTING ENGINEERS & SURVEYORS
NORWALK, OHIO

DATE:	Feb., 2026	CK'D. BY:	AEW	PROJECT NO. 26-204
DR. BY:	DAG	REV'D BY:		

- | | | | |
|---|------|-----|--|
| ① | ITEM | 254 | PAVEMENT PLANING & PROFILING - ASPHALT CONCRETE
3"± DEPTH AS REQUIRED TO MATCH NEW PAVEMENT
TO EXISTING CONCRETE GUTTER ELEVATION. |
| ② | ITEM | 441 | 1 3/4" ASPHALT CONCRETE - INTERMEDIATE COURSE
(TYPE 2, (448), PG64-22) |
| ③ | ITEM | 441 | 1 1/4" ASPHALT CONCRETE SURFACE COURSE - (TYPE 1, (448), PG64-22) |
| ④ | ITEM | 407 | TACK COAT (0.08 gal/SY) |
| ⑤ | | | EXISTING CONCRETE CURB & GUTTER TO REMAIN |

TYPICAL SECTION – ASPHALT PAVEMENT RESURFACING

CROSSINGS ROAD STA. 0+87.38 TO 24+19.21
FUN DRIVE STA. 5+82.65 TO END

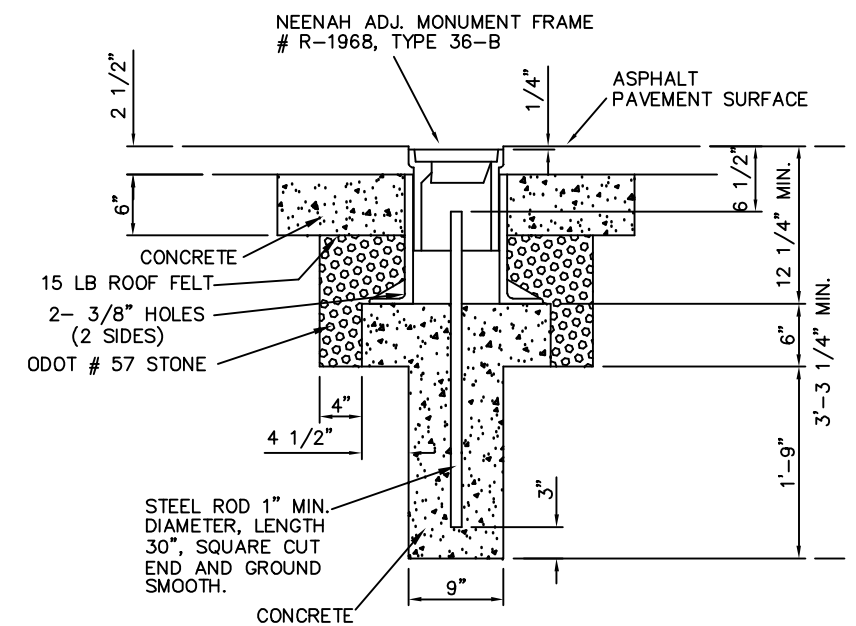

EXISTING MONUMENT ASSEMBLY

CONTRACTOR TO ADJUST FRAME & LID TO GRADE PRIOR
TO INSTALLATION OF ASPHALT SURFACE COURSE.

CROSSINGS RD. RESURFACING PROJECT DETAILS



CONTRACTORS
DESIGN ENGINEERING
 CONSULTING ENGINEERS & SURVEYORS
 NORWALK, OHIO

DATE: Feb., 2026	CK'D. BY: AEW	PROJECT NO. 26-204
DR. BY: DAG	REV'D BY:	